






## FEATURES

- Housing: Die-cast aluminum powder coated.
- Diffuser: Tempered glass
- Light Source: Bridgelux USA
- Life Span: 50,000 Hrs
- Operating Temp: -20°C to 50°C
- Options: Micro wave sensor, Daylight Sensor, 0-10V dimming, DALI dimming and 60° and 90° aluminium reflectors.

**Manufactured in accordance with all International Standards**

Product Model	Total Power	Lumen	CCT	Dimension D x H
LM-002-HBEUICW-100W	100W	13000 Lm	6000K	260x140mm
LM-002-HBEUINW-100W	100W	13000 Lm	4000K	260x140mm
LM-002-HBEUIWW-100W	100W	13000 Lm	3000K	260x140mm
LM-002-HBEUICW-120W	120W	15600 Lm	6000K	260x140mm
LM-002-HBEUINW-120W	120W	15600 Lm	4000K	260x140mm
LM-002-HBEUIWW-120W	120W	15600 Lm	3000K	260x140mm
LM-002-HBEUICW-160W	160W	20800 Lm	6000K	260x140mm
LM-002-HBEUINW-160W	160W	20800 Lm	4000K	260x140mm
LM-002-HBEUIWW-160W	160W	20800 Lm	3000K	260x140mm
LM-002-HBEUICW-200W	200W	26000 Lm	6000K	295x140mm
LM-002-HBEUINW-200W	200W	26000 Lm	4000K	295x140mm
LM-002-HBEUIWW-200W	200W	26000 Lm	3000K	295x140mm




## Description

Lyte Master Diamond High Bay luminaires are designed to be durable, long life, easy installation and low maintenance with high efficiency. Diamond is made with premium grade aluminium die cast housing enhanced with mechanical capacity and structure strength and stainless-steel accessories with good heat dissipation helped by transparent cross ventilation and high quality Bridgelux LEDs. It has a standard beam angle of 120° with optional lenses for narrow or wide beam patterns and glare reductions. The product is compatible with all leading sensor brands with dimming options in 0-10V or DALI.

## Area of Application

Factories, Warehouses, Supermarkets & other large areas

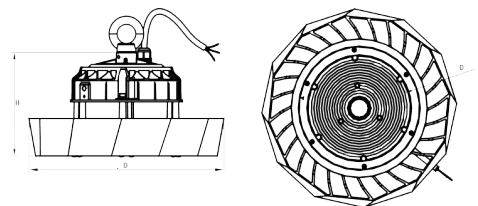

IK09	DALI		1-10 DIMMING	PHASE DIMMING
IP65	LM-80	LED	SMD	
CRI >90	RoHS	CE	Series Wiring	
85-265V   50/60Hz				
LED DRIVERS	TRIDONIC	Lyte Master	LED CHIPS: BRIDGELUX, CREE	