




FEATURES

- Housing: Extruded aluminum powder coated.
- Diffuser: PMMA Opal
- Light Source: BridgeLux USA
- Life Span: 50,000 Hrs
- Operating Temp: -20°C to 50°C

Manufactured in accordance with all International Standards

Product Model	Total Power	Lumen	CCT	Dimension
LM-102-DPRRCW-6W	6W	570 Lm	6000K	Dia120x12mm, Cut Out: 105mm
LM-102-DPRRNW-6W	6W	570 Lm	4000K	Dia120x12mm, Cut Out: 105mm
LM-102-DPRRWW-6W	6W	570 Lm	3000K	Dia120x12mm, Cut Out: 105mm
LM-102-DPRRCW-9W	9W	855 Lm	6000K	Dia150x12mm, Cut Out: 135mm
LM-102-DPRRNW-9W	9W	855 Lm	4000K	Dia150x12mm, Cut Out: 135mm
LM-102-DPRRWW-9W	9W	855 Lm	3000K	Dia150x12mm, Cut Out: 135mm
LM-102-DPRRCW-12W	12W	1140 Lm	6000K	Dia170x12mm, Cut Out: 155mm
LM-102-DPRRNW-12W	12W	1140 Lm	4000K	Dia170x12mm, Cut Out: 155mm
LM-102-DPRRWW-12W	12W	1140 Lm	3000K	Dia170x12mm, Cut Out: 155mm
LM-102-DPRRCW-15W	15W	1425 Lm	6000K	Dia190x12mm, Cut Out: 170mm
LM-102-DPRRNW-15W	15W	1425 Lm	4000K	Dia190x12mm, Cut Out: 170mm
LM-102-DPRRWW-15W	15W	1425 Lm	3000K	Dia190x12mm, Cut Out: 170mm
LM-102-DPRRCW-18W	18W	1710 Lm	6000K	Dia220x12mm, Cut Out: 195mm
LM-102-DPRRNW-18W	18W	1710 Lm	4000K	Dia220x12mm, Cut Out: 195mm
LM-102-DPRRWW-18W	18W	1710 Lm	3000K	Dia220x12mm, Cut Out: 195mm
LM-102-DPRRCW-20W	20W	1900 Lm	6000K	Dia220x12mm, Cut Out: 195mm
LM-102-DPRRNW-20W	20W	1900 Lm	4000K	Dia220x12mm, Cut Out: 195mm
LM-102-DPRRWW-20W	20W	1900 Lm	3000K	Dia220x12mm, Cut Out: 195mm
LM-102-DPRRCW-24W	24W	2280 Lm	6000K	Dia300x12mm, Cut Out: 282mm
LM-102-DPRRNW-24W	24W	2280 Lm	4000K	Dia300x12mm, Cut Out: 282mm
LM-102-DPRRWW-24W	24W	2280 Lm	3000K	Dia300x12mm, Cut Out: 282mm



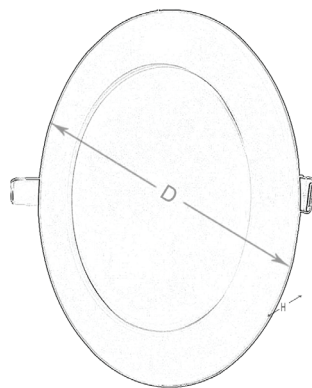


Description

Lyte Master Opal LED slim panel light adopts qualified super bright LEDs as light source, which are stable, long life and have no UV & IR emission. The anodized frame is stylish and fashionable with everlasting color. It has a standard beam angle of 120°. The product is compatible with all leading sensor brands with dimming options in 0-10V or DALI.

Area of Application

Corridors, Villa, Offices & Meeting Rooms

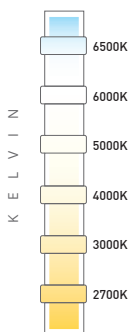

IK02	IP40	DALI	1-10 DIMMING	PHASE DIMMING
LM-80	LED	SMD	Series Wiring	
CRI >90	RoHS	CE		
100-240V 50/60Hz				
LED DRIVERS	MW	TRIDONIC	Lyte Master	LED CHIPS: bridgeLux, CREE+