



FEATURES

- Housing: Die Cast aluminum powder coated.
- Reflector: Anodized Aluminium
- Diffuser: Tempered Glass
- Light Source: BridgeLux USA
- Life Span: 50,000 Hrs
- Operating Temp: -20°C to 50°C

Manufactured in accordance with all International Standards





Product Model	Total Power	Lumen	CCT	Dimension	Cut-Out
LM-022-DLZ2GCW-9W	9W	900 Lm	6000K	Dia:105xH91mm	Dia:95mm
LM-022-DLZ2GNW-9W	9W	900 Lm	4000K	Dia:105xH91mm	Dia:95mm
LM-022-DLZ2GWW-9W	9W	900 Lm	3000K	Dia:105xH91mm	Dia:95mm
LM-022-DLZ2GCW-12W	12W	1200 Lm	6000K	Dia:105xH111mm	Dia:95mm
LM-022-DLZ2GNW-12W	12W	1200 Lm	4000K	Dia:105xH111mm	Dia:95mm
LM-022-DLZ2GWW-12W	12W	1200 Lm	3000K	Dia:105xH111mm	Dia:95mm
LM-022-DLZ2GCW-15W	15W	1500 Lm	6000K	Dia:125xH117mm	Dia:115mm
LM-022-DLZ2GNW-15W	15W	1500 Lm	4000K	Dia:125xH117mm	Dia:115mm
LM-022-DLZ2GWW-15W	15W	1500 Lm	3000K	Dia:125xH117mm	Dia:115mm
LM-022-DLZ2GCW-20W	20W	2000 Lm	6000K	Dia:145xH141mm	Dia:135mm
LM-022-DLZ2GNW-20W	20W	2000 Lm	4000K	Dia:145xH141mm	Dia:135mm
LM-022-DLZ2GWW-20W	20W	2000 Lm	3000K	Dia:145xH141mm	Dia:135mm
LM-022-DLZ2GCW-30W	30W	3000 Lm	6000K	Dia:160xH140mm	Dia:150mm
LM-022-DLZ2GNW-30W	30W	3000 Lm	4000K	Dia:160xH140mm	Dia:150mm
LM-022-DLZ2GWW-30W	30W	3000 Lm	3000K	Dia:160xH140mm	Dia:150mm

Description

Lyte Master Glaze Pro LED down light adopts qualified super bright LEDs as light source, which are stable, long life and have no UV & IR emission. This series is an innovative range of professional recessed spotlights, created to deliver high lighting performance and excellent visual comfort, without forgetting about energy saving and "green" requirements. The classic deep source elegant design of this spotlight is the result of very well-versed staff and an excellent raw materials choice. The COB LED is specially chosen to provide high lumen results in uniform and pleasant light effect. It has different beam angles. The product is compatible with all leading sensor brands with dimming options in 0-10V or DALI.

Area of Application

Offices, Villas, Apartments, Stores & Malls

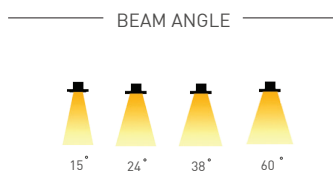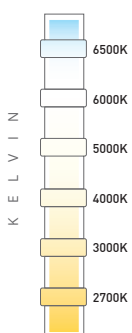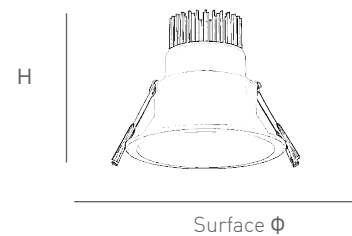

IK07	DALI	1-10 DIMMING	PHASE DIMMING
IP44	LM-80	LED	COB
CRI >90	ROHS	CE	Series Wiring
85-265V 50/60Hz			
LED DRIVERS	MW	TRIDONIC	Lyte Master