



## FEATURES

Housing: Aluminium Extrusion

Constant Voltage Power Supply.

Efficiency →90%

Input / Output flying leads

50,000 Hour life span

Input Voltage: 220-240V AC, 50/60Hz

Output Voltage: Constant 24V DC

Power Factor: 0.9

Operating Temperature: from -20° to 65°C

**Manufactured in accordance with all International Standards**


Product Model	Power	Input Voltage	Dimmable	Dimension LxWxH
LM-001-DRSV20-40W	40W	100V-264V / AC	Normal	230x50x30mm
LM-001-DRSV20D-40W	40W	100V-264V / AC	Dimmable	230x50x30mm
LM-001-DRSV20-60W	60W	100V-264V / AC	Normal	230x50x30mm
LM-001-DRSV20D-60W	60W	100V-264V / AC	Dimmable	230x50x30mm
LM-001-DRSV20-100W	100W	100V-264V / AC	Normal	230x50x30mm
LM-001-DRSV20D-100W	100W	100V-264V / AC	Dimmable	230x50x30mm
LM-001-DRSV20-150W	150W	100V-264V / AC	Normal	230x50x30mm
LM-001-DRSV20D-150W	150W	100V-264V / AC	Dimmable	230x50x30mm
LM-001-DRSV20-200W	200W	100V-264V / AC	Normal	230x50x30mm
LM-001-DRSV20D-200W	200W	100V-264V / AC	Dimmable	230x50x30mm

## Description

High quality IP20 power supplies, designed and developed by Lyte Master lighting designers to suit a variety of outdoor lighting applications. These power supplies provide an extremely robust and flexible lighting solution due to their unique multi-tap system. Lyte Master provides many different types of accessories to enhance its products performance.

## Area of Application

Wall Mounted, Indoor, Pillar Mounted

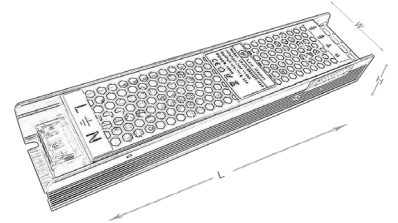

IK06			
IP20	DALI	1-10 DIMMING	PHASE DIMMING
RoHS	CE	CE	Series Wiring
85-265V   50/60Hz			