



## FEATURES

Housing: Aluminium Extrusion

Constant Voltage Power Supply.

Efficiency →90%

Input / Output flying leads

50,000 Hour life span

Input Voltage: 220-240V AC, 50/60Hz

Output Voltage: Constant 24V DC

Power Factor: 0.9

Operating Temperature: from -20° to 65°C

**Manufactured in accordance with all International Standards**


Product Model	Power	Input Voltage	Dimmable	Dimension LxWxH
LM-001-DRSV67-40W	40W	100V-264V / AC	Normal	110x49x39mm
LM-001-DRSV67D-40W	40W	100V-264V / AC	Dimmable	110x49x39mm
LM-001-DRSV67-60W	60W	100V-264V / AC	Normal	220x49x39mm
LM-001-DRSV67D-60W	60W	100V-264V / AC	Dimmable	220x49x39mm
LM-001-DRSV67-100W	100W	100V-264V / AC	Normal	230x69x39mm
LM-001-DRSV67D-100W	100W	100V-264V / AC	Dimmable	230x69x39mm
LM-001-DRSV67-150W	150W	100V-264V / AC	Normal	180x69x39mm
LM-001-DRSV67D-150W	150W	100V-264V / AC	Dimmable	180x69x39mm
LM-001-DRSV67-200W	200W	100V-264V / AC	Normal	183x76x39mm
LM-001-DRSV67D-200W	200W	100V-264V / AC	Dimmable	183x76x39mm

## Description

High quality IP67 power supplies, designed and developed by Lyte Master lighting designers to suit a variety of outdoor lighting applications. These power supplies provide an extremely robust and flexible lighting solution due to their unique multi-tap system. Lyte Master provides many different types of accessories to enhance its products performance.

## Area of Application

Wall Mounted, Outdoor, Pillar Mounted

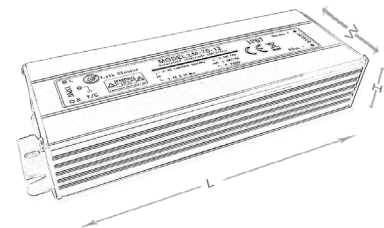

IK08			
IP67	DALI	1-10 DIMMING	PHASE DIMMING
RoHS	CE	CE	Series Wiring
85-265V   50/60Hz			