






FEATURES

- Housing: High Pressure Die-cast aluminum powder coated.
- Diffuser: Tempered glass / PMMA
- Light Source: BridgeLux/Cree/ Philips
- Life Span: 50,000 Hrs
- Operating Temp: -40°C to 70°C
- Solar Panel: High Efficiency monocrystalline silicon
- Solar Charge Controller: PWM/MPPT 10A
- Control Option: Programmable dimming & Sensor function
- Battery: LiFePO4 Lithium battery
- Capacity: Upto 1300wh

Manufactured in accordance with all International Standards

Product Model	Total Power	Lumen	CCT	Dimension LxWxH
LM-002-SSCT1CW-30W	30W	3900 Lm	6000K	1000x370x100mm
LM-002-SSCT1NW-30W	30W	3900 Lm	4000K	1000x370x100mm
LM-002-SSCT1WW-30W	30W	3900 Lm	3000K	1000x370x100mm
LM-002-SSCT1CW-40W	40W	5200 Lm	6000K	1000x370x100mm
LM-002-SSCT1NW-40W	40W	5200 Lm	4000K	1000x370x100mm
LM-002-SSCT1WW-40W	40W	5200 Lm	3000K	1000x370x100mm
LM-002-SSCT1CW-60W	60W	7800 Lm	6000K	1480x370x100mm
LM-002-SSCT1NW-60W	60W	7800 Lm	4000K	1480x370x100mm
LM-002-SSCT1WW-60W	60W	7800 Lm	3000K	1480x370x100mm


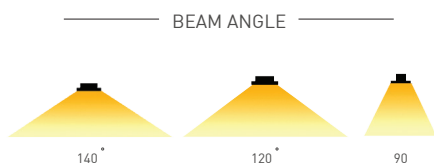



Description

Lyte Master Capture Model All in One Solar Street light is the latest addition to our arsenal. Which integrates a lithium battery and smart controller into the light head that can provide up to 9,000 lumens and 24 hours of battery backup in a completely automated operation with solar panels integrated on the back side of the fitting. Light luminaires are designed to be durable, long life, easy installation and low maintenance. Capture All in one solar street light has surveillance system with inbuilt CCTV and LED running on solar and an inbuilt dimmer, LiFePO4 lithium-ion battery and light sensor.

Area of Application

Street Light, Road Light & Area Lighting



60w

- IK10
- IP66
- LM-80
- CRI >90
- DALI
- 1-10 DIMMING
- LED
- RoHS
- PHASE DIMMING
- COB
- CE
- Series Wiring
- 85-265V | 50/60Hz

LED DRIVERS: LEDVANCE, TRIDONIC, Lyte Master
LED CHIPS: bridgeLux, CREE+, Lyte Master