





FEATURES

- Housing: High Pressure Die-cast aluminum powder coated.
- Diffuser: Tempered glass / PMMA
- Light Source: BridgeLux/Cree/ Philips
- Life Span: 50,000 Hrs
- Operating Temp: -40°C to 70°C
- Solar Panel: High Efficiency monocrystalline silicon
- Solar Charge Controller: PWM/MPPT 10A
- Control Option: Programmable dimming & Sensor function
- Battery: LiFePO4 Lithium battery
- Capacity: Upto 1300wh

Manufactured in accordance with all International Standards

Product Model	Total Power	Lumen	CCT	Dimension LxWxH
LM-002-SSI5RCW-10W	10W	2000 Lm	6000K	550X220X200mm
LM-002-SSI5RNW-10W	10W	2000 Lm	4000K	550X220X200mm
LM-002-SSI5RWW-10W	10W	2000 Lm	3000K	550X220X200mm
LM-002-SSI5RCW-15W	15W	3000 Lm	6000K	550X220X200mm
LM-002-SSI5RNW-15W	15W	3000 Lm	4000K	550X220X200mm
LM-002-SSI5RWW-15W	15W	3000 Lm	3000K	550X220X200mm
LM-002-SSI5RCW-20W	20W	4000 Lm	6000K	550X220X200mm
LM-002-SSI5RNW-20W	20W	4000 Lm	4000K	550X220X200mm
LM-002-SSI5RWW-20W	20W	4000 Lm	3000K	550X220X200mm
LM-002-SSI5RCW-25W	25W	5000 Lm	6000K	550X220X200mm
LM-002-SSI5RNW-25W	25W	5000 Lm	4000K	550X220X200mm
LM-002-SSI5RWW-25W	25W	5000 Lm	3000K	550X220X200mm
LM-002-SSI5RCW-30W	30W	6000 Lm	6000K	550X220X200mm
LM-002-SSI5RNW-30W	30W	6000 Lm	4000K	550X220X200mm
LM-002-SSI5RWW-30W	30W	6000 Lm	3000K	550X220X200mm
LM-002-SSI5RCW-40W	40W	8000 Lm	6000K	550X220X200mm
LM-002-SSI5RNW-40W	40W	8000 Lm	4000K	550X220X200mm
LM-002-SSI5RWW-40W	40W	8000 Lm	3000K	550X220X200mm
LM-002-SSI5RCW-50W	50W	10000 Lm	6000K	550X220X200mm
LM-002-SSI5RNW-50W	50W	10000 Lm	4000K	550X220X200mm
LM-002-SSI5RWW-50W	50W	10000 Lm	3000K	550X220X200mm


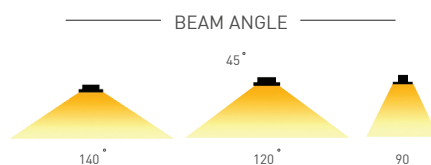



Description

Lyte Master Orion Model Solar Street light is the most advanced form of solar roadway lighting available, that integrates a lithium battery and smart controller into the light head that can provide up to 10,000 lumens and 24 hours of battery backup in a completely automated operation with solar panels integrated on the pole. Light luminaire are designed to be durable, long life, easy installation and low maintenance. Orion model is made with high pressure aluminium die cast housing with high efficiency and completely corrosion resistance body and stainless-steel accessories with high quality Bridgelux LEDs.

Area of Application

Street Light, Road Light & Area Lighting

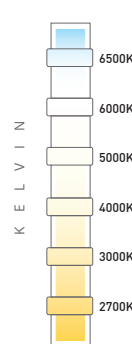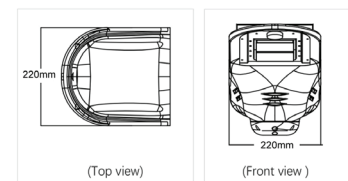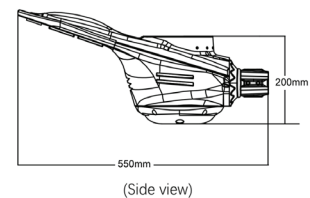

IK10	DALI			1-10 DIMMING	PHASE DIMMING
IP66	LM-80	LM-80	LED	COB	
CRI >90	RoHS	CE	Series Wiring		
85-265V 50/60Hz					
LED DRIVERS	MW	TRIDONIC	Lyte Master	LED CHIPS	bridgelux