



## FEATURES

- Housing: Aluminium Alloy with SS 309/316 trim.
- Diffuser: Tempered Glass.
- Reflector: Aluminium.
- Light Source: BridgeLux USA
- Life Span: 50,000 Hrs
- Operating Temp: -20°C to 50°C

Manufactured in accordance with all International Standards


## Description

Lyte Master Mirage in-ground linear light generates an effect. Sometimes an eye-catcher, at other times showing the way. They accentuate entrance areas or emphasize architectural contours. Mirage can be integrated in façades and floor spaces – they are always an optical highlight. The LED luminaire is well-designed, apparent like an object and achieves a maximum effect as a wall-washer for façade illumination.




## Area of Application

Ramp Light, Wall Recessed, Walkway Light

Product Model	Total Power	Lumen	CCT	Dimension
LM-003-ICWWF5CW-11W	11W	1100 Lm	6000K	L999xW50xH87mm
LM-003-ICWWF5NW-11W	11W	1100 Lm	4000K	L999xW50xH87mm
LM-003-ICWWF5WW-11W	11W	1100 Lm	3000K	L999xW50xH87mm
LM-003-ICWWF5CW-18W	18W	1800 Lm	6000K	L999xW50xH87mm
LM-003-ICWWF5NW-18W	18W	1800 Lm	4000K	L999xW50xH87mm
LM-003-ICWWF5WW-18W	18W	1800 Lm	3000K	L999xW50xH87mm
LM-003-ICWWF5CW-21W	21W	2100 Lm	6000K	L999xW50xH87mm
LM-003-ICWWF5NW-21W	21W	2100 Lm	4000K	L999xW50xH87mm
LM-003-ICWWF5WW-21W	21W	2100 Lm	3000K	L999xW50xH87mm

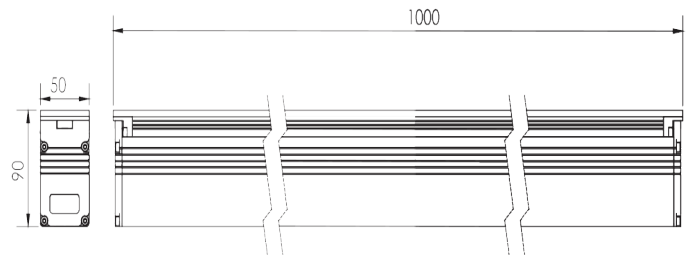

Size: L999\*W50\*H87mm

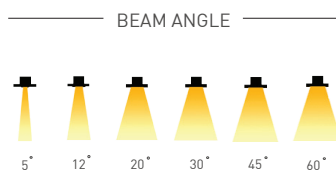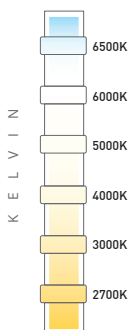

IK08			
IP67	DALI	1-10 DIMMING	PHASE DIMMING
LM-80	LM-80	LED	COB
CRI >90	RoHS	CE	Series Wiring
85-265V   50/60Hz			
LED DRIVERS	MW	TRIDONIC	Lyte Master

LED CHIPS: bridgeLux, CREE+, Lyte Master