



## FEATURES

- Housing: Die Cast Aluminium with SS 309/316 trim.
- Diffuser: Tempered Glass.
- Reflector: Aluminium.
- Light Source: BridgeLux USA
- Life Span: 50,000 Hrs
- Operating Temp: -20°C to 50°C

Manufactured in accordance with all International Standards





Product Model	Total Power	Lumen	CCT	Dimension DxH	Cut-Out
LM-003-IGHCICW-3W	3W	300 Lm	6000K	65x75mm	Dia:60mm
LM-003-IGHCINW-3W	3W	300 Lm	4000K	65x75mm	Dia:60mm
LM-003-IGHCIWW-3W	3W	300 Lm	3000K	65x75mm	Dia:60mm
LM-003-IGHCICW-6W	6W	600 Lm	6000K	65x75mm	Dia:60mm
LM-003-IGHCINW-6W	6W	600 Lm	4000K	65x75mm	Dia:60mm
LM-003-IGHCIWW-6W	6W	600 Lm	3000K	65x75mm	Dia:60mm
LM-003-IGHCICW-9W	9W	900 Lm	6000K	150x90mm	Dia:145mm
LM-003-IGHCINW-9W	9W	900 Lm	4000K	150x90mm	Dia:145mm
LM-003-IGHCIWW-9W	9W	900 Lm	3000K	150x90mm	Dia:145mm

## Description

Lyte Master Sparkle LED in-ground luminaire decorates your outdoors. A clean beam of energy-efficient LED light is available in a package characterized by easy maintenance. From die-cast aluminium body, this fixture is designed for years of corrosion-resistant use. Intended for installation in soil or gravel. The LED system provides very convenient quality / price report, as it is warranty of energy savings up to 90% compared to the old luminaires.

## Area of Application

Ramp Light, Wall Recessed, Walkway Light

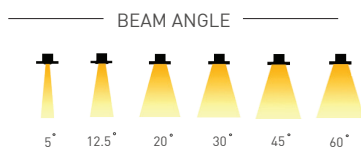

IK08			
IP67	DALI	1-10 DIMMING	PHASE DIMMING
LM-80	LM-80	LED	COB
CRI >90	RoHS	CE	Series Wiring
85-265V   50/60Hz			
LED DRIVERS	MW	TRIDONIC	Lyte Master

LED CHIPS: bridgeLux, CREE, Lyte Master