

Description

Lyte Master Oasis in-ground linear light generates an effect. It can be used to immerse façades in light. Dark exterior areas become a thing of the past. The LED luminaire is well-designed, apparent like an object and achieves a maximum effect as a wall-washer for façade illumination.

FEATURES

Housing: Aluminium Alloy with SS 309/316 trim.

Diffuser: Tempered Glass.

Reflector: Aluminium.

Light Source: BridgeLux USA

Life Span: 50,000 Hrs





Operating Temp: -20°C to 50°C

Manufactured in accordance with all International Standards

Product Model	Total Power	Lumen	CCT	Dimension
LM-003-IGRW8CW-11W	11W	1100 Lm	6000K	L999xW50xH87mm
LM-003-IGRW8NW-11W	11W	1100 Lm	4000K	L999xW50xH87mm
LM-003-IGRW8WW-11W	11W	1100 Lm	3000K	L999xW50xH87mm
LM-003-IGRW8CW-18W	18W	1800 Lm	6000K	L999xW50xH87mm
LM-003-IGRW8NW-18W	18W	1800 Lm	4000K	L999xW50xH87mm
LM-003-IGRW8WW-18W	18W	1800 Lm	3000K	L999xW50xH87mm
LM-003-IGRW8CW-21W	21W	2100 Lm	6000K	L999xW50xH87mm
LM-003-IGRW8NW-21W	21W	2100 Lm	4000K	L999xW50xH87mm
LM-003-IGRW8WW-21W	21W	2100 Lm	3000K	L999xW50xH87mm

Area of Application

Wall Mounted, Outdoor, Pillar Mounted

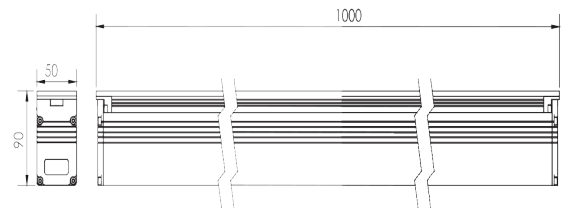

IK08	DALI	1-10 DIMMING	PHASE DIMMING
IP67	LM-80	LED	COB
CRI >90	RoHS	CE	Series Wiring
85-265V 50/60Hz			
LED DRIVERS	MW	TRIDONIC	Lyte Master

LED CHIPS: bridgeLux, CREE, Lyte Master