



## FEATURES

- Housing: Aluminium Alloy with SS 309/316 trim.
- Diffuser: Tempered Glass.
- Reflector: Aluminium.
- Light Source: BridgeLux USA
- Life Span: 50,000 Hrs
- Operating Temp: -20°C to 50°C

Manufactured in accordance with all International Standards



Product Model	Total Power	Lumen	CCT	Dimension LxWxH	Cut-Out
LM-003-IGWW5CW-11W	11W	1100 Lm	6000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5NW-11W	11W	1100 Lm	4000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5WW-11W	11W	1100 Lm	3000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5CW-18W	18W	1800 Lm	6000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5NW-18W	18W	1800 Lm	4000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5WW-18W	18W	1800 Lm	3000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5CW-21W	21W	2100 Lm	6000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5NW-21W	21W	2100 Lm	4000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5WW-21W	21W	2100 Lm	3000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5CW-28W	28W	2800 Lm	6000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5NW-28W	28W	2800 Lm	4000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5WW-28W	28W	2800 Lm	3000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5CW-42W	42W	4200 Lm	6000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5NW-42W	42W	4200 Lm	4000K	1000x90x100mm	L992xW70mm
LM-003-IGWW5WW-42W	42W	4200 Lm	3000K	1000x90x100mm	L992xW70mm

## Description




Lyte Master Elite in-ground linear light generates an effect. It can be used to immerse façades in light. Dark exterior areas become a thing of the past. The LED luminaire is well-designed, apparent like an object and achieves a maximum effect as a wall-washer for façade illumination.

## Area of Application

Ramp Light, Wall Recessed, Walkway Light

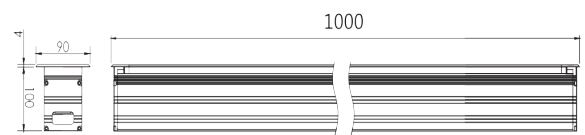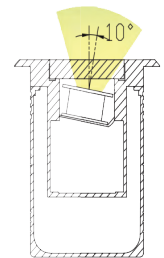

Size: L992\*W70\*H100mm

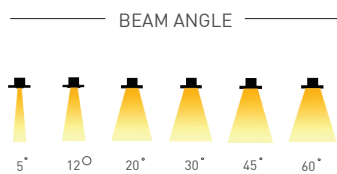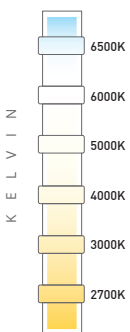

IK08	DALI			1-10 DIMMING	PHASE DIMMING
IP67	LM-80	LED	COB	Series Wiring	
CRI >90	RoHS	CE	85-265V   50/60Hz		
LED DRIVERS		MW	TRIDONIC	Lyte Master	

LED CHIPS: bridgeLux, CREE, Lyte Master