



## FEATURES

- Housing: Die Cast aluminum powder coated.
- Diffuser: PMMA Diffuser
- Light Source: BridgeLux USA
- Life Span: 50,000 Hrs
- Operating Temp: -20°C to 50°C

Manufactured in accordance with all International Standards





| Product Model      | Total Power | Lumen   | CCT   | Dimension                     |
|--------------------|-------------|---------|-------|-------------------------------|
| LM-010-WH1SRCW-8W  | 8W          | 960 Lm  | 6000K | 125x125X31H ; Cut Out:100X100 |
| LM-010-WH1SRNW-8W  | 8W          | 960 Lm  | 4000K | 125x125X31H ; Cut Out:100X100 |
| LM-010-WH1SRWW-8W  | 8W          | 960 Lm  | 3000K | 125x125X31H ; Cut Out:100X100 |
| LM-010-WH1SRCW-12W | 12W         | 1440 Lm | 6000K | 150x150X31H ; Cut Out:125X125 |
| LM-010-WH1SRNW-12W | 12W         | 1440 Lm | 4000K | 150x150X31H ; Cut Out:125X125 |
| LM-010-WH1SRWW-12W | 12W         | 1440 Lm | 3000K | 150x150X31H ; Cut Out:125X125 |
| LM-010-WH1SRCW-15W | 15W         | 1800 Lm | 6000K | 150x150X31H ; Cut Out:125X125 |
| LM-010-WH1SRNW-15W | 15W         | 1800 Lm | 4000K | 150x150X31H ; Cut Out:125X125 |
| LM-010-WH1SRWW-15W | 15W         | 1800 Lm | 3000K | 150x150X31H ; Cut Out:125X125 |
| LM-010-WH1SRCW-18W | 18W         | 2160 Lm | 6000K | 175x175X31H ; Cut Out:150X150 |
| LM-010-WH1SRNW-18W | 18W         | 2160 Lm | 4000K | 175x175X31H ; Cut Out:150X150 |
| LM-010-WH1SRWW-18W | 18W         | 2160 Lm | 3000K | 175x175X31H ; Cut Out:150X150 |
| LM-010-WH1SRCW-25W | 25W         | 3000 Lm | 6000K | 225x225X31H ; Cut Out:200X200 |
| LM-010-WH1SRNW-25W | 25W         | 3000 Lm | 4000K | 225x225X31H ; Cut Out:200X200 |
| LM-010-WH1SRWW-25W | 25W         | 3000 Lm | 3000K | 225x225X31H ; Cut Out:200X200 |

## Description

Lyte Master Whizzy SQ LED square panel lights are environment friendly and energy consumption savings guaranteed from its characteristics. It has a classic shape and elegant design. Suitable for lobbies, corridors, elevators, conference rooms, common spaces, kitchen and interiors in commercial, hospitality, and residential environments. The downlight is equipped with high quality built-in extractable driver. The product is compatible with all leading sensor brands with dimming options in 0-10V or DALI.

## Area of Application

Corridors, False Ceiling, Offices & Villas

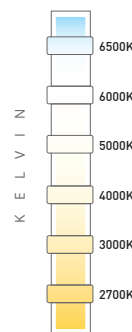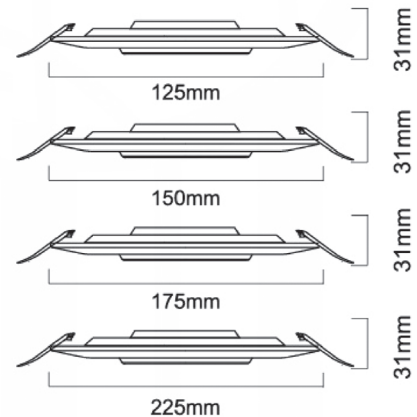

|                    |          |              |  |
|--------------------|----------|--------------|--|
| IK02               | DALI     | 1-10 DIMMING | PHASE DIMMING                            |
| IP44               | LM-80    | LED          | SMD                                      |
| CRI >90            | RoHS     | CE           | Series Wiring                            |
| 100-240V   50/60Hz |          |              |  |
| LED DRIVERS        | TRIDONIC | Lyte Master  | LED CHIPS: bridgeLux, CREE+, Lyte Master |